

# SPECIFICATION

## FD-100T series waterproof power supply

Product Name: FD-100T-XXXX

Summarize: 96W LED Driver

Version: V00

Release date: 2022-04-13

**Add.:Floor 2,4,5, 6 Building C, Starlight Industrial Park, NO. 4, Shihuan Road,Shilong Community, Shiyan Town, Bao'an District, Shenzhen, China.**

**Customer ID :** \_\_\_\_\_**Customer Model :** \_\_\_\_\_**Products Code :** \_\_\_\_\_**Sample Model :** \_\_\_\_\_**Version :** \_\_\_\_\_

<b>GNATURE AND SEAL BY US</b>		
<b>Date:</b>	<b>2022/04/13</b>	
<b>Prepared By</b>	<b>Checked By</b>	<b>Approved By</b>
QiAi Liu	Zhuanhong Wu	Jafei Lin

Please confirm and send it back with signature within 7 days. Otherwise we will assume your acceptance. And if any quality dissent, there will be an executor according to this product specification.		
<b>CUSTOMER APPROVED SIGNATURE</b>		
<b>Customer Model No:</b>		
<b>Date:</b>		
<b>ENG</b>	<b>QA</b>	<b>OTHER</b>

### Feature:



- ◆ IP65
- ◆ Max output power 96W.
- ◆ Constant current design.
- ◆ 3 in 1 dimming mode:0-10V,PWM,RX
- ◆ Smoothly dimming(0-100%),can dim to off.
- ◆ CE UL FCC Certified
- ◆ Surge protection :Differential mode:6KV.Common mode:6KV
- ◆ PROTECTION: Short Circuit, Open Circuit
- ◆ Auxiliary output 12V/200mA .
- ◆ Dimming signal is isolated from LED output.

### Application:

Street lights、 High bay lights

### Introduction


The document details the electrical, mechanical and environmental specifications of a 96W constant current LED driver with 0-10V Dimming. This LED driver is only suitable for LED load.

### Model and Key parameters Table 1

Model	power (W)	Output voltage (V)	Max output voltage(Vdc)	output current (A)	Efficiency(%) @120V	Efficiency(%) @347V
FD-100T-054*/B/C/D/Z	96	27-54	63	1.3-2.6	86	88

### Model code naming rules

#### FD-100T-054B-XXXX

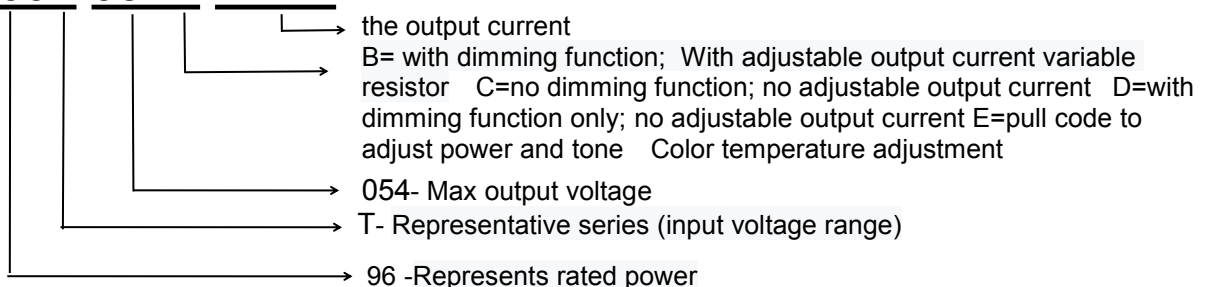

**■ Technical data**

<b>Input characteristics</b>	
Input Voltage	100-347Vac
Input Frequency	50/60Hz
Input Current (Typ.)	1.2A @100-347 Vac , 100% load
No load Voltage	2Wmax
Inrush Current	60Amax. @ 347Vac, 25°C
Power factor (Typ.)	PF>0.90 @ 100Vac, PF>0.90 @ 347Vac, 100% load, see chart 2
THD	THD<20% @ 100-347 Vac, 100% load see chart 3
<b>Output characteristics</b>	
Current accuracy	± 5%
Efficiency	≥86% @ 120 Vac, ≥88% @ 347Vac, see chart 1
Output Voltage	Table 1
Ripple and Noise	800mVp-p
Line Regulation	3%
Load Regulation	3%
Turn On Delay Time	Under normal conditions, the maximum delay time is 1 second
<b>Built-in potentiometer to adjust current</b>	
Potentiometer current output range	the total output power does not exceed 96W (actual output voltage * actual output current = power), otherwise, it can not be guaranteed.
<b>Protection functions</b>	
Open circuit	When the LED disconnection the product is protected such as hiccup or when it is at the highest point of output voltage, the power supply shall be self-recovery when the fault condition is removed.
Short Circuit	The input power shall decrease when the output rail short, the power supply shall be self-recovery when the fault condition is removed.
<b>Environmental conditions</b>	
Operating Temperature	-40°C - +60°C
Operating Relative Humidity	10% to 90% RH, non-condensing
Storage Temperature	-40°C to +75°C
Storage Relative Humidity	10% to 90%RH, non-condensing (Sea level to 2,000 m)
Vibration	10 to 500HZ Sweep at constant acceleration of 1.0G (depth: 3.5mm )for 1 Hour for each of the perpendicular axes X, Y, Z.
Degrees of Protection	IP65
<b>Safety compliance</b>	
Dielectric Strength	P-S:3750VAC/5mA/60S      P-E:1500VAC/5mA/60S S-E:500VAC/5mA/60S

Insulation Resistance	I/P-O/P:>50M Ohms / 500VDC / 25°C / 70% RH.
Leakage Current	The leakage current shall be less than 0.25mA for Class 2 at maximum input voltage
Safety Standard	UL:UL8750, CSA 250.13
EMI	FCC: PART 15B Subpart B; ANSI C63.4:2014
EMS	CE-EMC/RCM: EN61000-4-2,3,4,5,6,11 CCC:GB/T17626.2,3,4,5,6,11
ESD	Electrostatic discharge/immunity Severity Level Level3 air discharge: ±8KV Severity Level Level2 contact discharge: ±4KV performance criterion: B
RF	80-1000MHZ; Severity Level Level2/ 3V/M; Performance Criterion: A
Group pulse	1.0KV (Class B)
Surge Immunity	Severity Level Level2 Differential mode:6KV Severity Level Level3 Common mode:6KV. performance criterion: B
<b>Reliability</b>	
Life Time	≥5Years H@347Vac, 100% load. See lifetime vs. Tc curve for the details
MTBF	≥ 200,000H@ 25°C,347Vac, 80% load. (MIL-HDBK-217F)
Warranty	5 years
<b>Others</b>	
Dimensions	176*50*35mm (L*W*H)
Weight	667g+/-10g
<b>Remark</b>	
<p>1、 It is recommended that customers install the over-voltage and under-voltage protection and surge protection devices in the lamp power supply circuit to ensure the safety of electricity consumption.</p> <p>2、 The led driver,as a part of the whole lamp is used in combination with the terminal equipment . As EMC performance is affected by LED lamps and wiring, terminal equipment manufactured supplier needs to re-confirm the EMC of the whole set of equipment.</p> <p>3、 Please use the debugging plastic cross or slotted screw driver to adjust the current of the led driver, otherwise it is easy to damage the potentiometer. (The use of a 2mm screwdriver is also acceptable. The torque should not exceed 0.5knm, and a good insulation screwdriver should be used.)</p> <p>4、 When adjusting the output current of the led driver, ensuring that the total output power does not exceed the rated maximum power.</p> <p>5、 The parameters above including the power factor, THD and efficiency are all tested under the condition of environment temperature 25°C , humidity 50%, AC input 230V and 90% output load.</p>	

## ■ Dimming function

Dimming type	parameter	Min	Typ	Max	Remarks
0-10V 1-10V	Signal Level	0V		10V	
	Dim Range	10%		100%	Output current percentage
	Dim-off Level	0.6V	0.7V	0.8V	
	On Level	0.75V	0.85V	0.95V	
PWM	Signal Level	0V		10V	
	Signal Frequency	1KHz		2KHz	
	duty ratio	5%		100%	
Resistance dimming	resistance value	10kΩ		100kΩ	
	Dimming range	10%		100%	Output current percentage


## ■ Dimming range

Function			0-10V				PWM			RX			
Yes Or No			Y				Y			Y			
0-10V	0	1	2	3	4	5	6	7	8	9	10	open	
Ir	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%	
PWM	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	open	
Ir	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%	
RX	0Ω	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90K Ω	100K Ω	open	
Ir	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%	


Note:

- it is the output current percentages.
- it is the typical datas.


## ■ Efficiency vs. Load

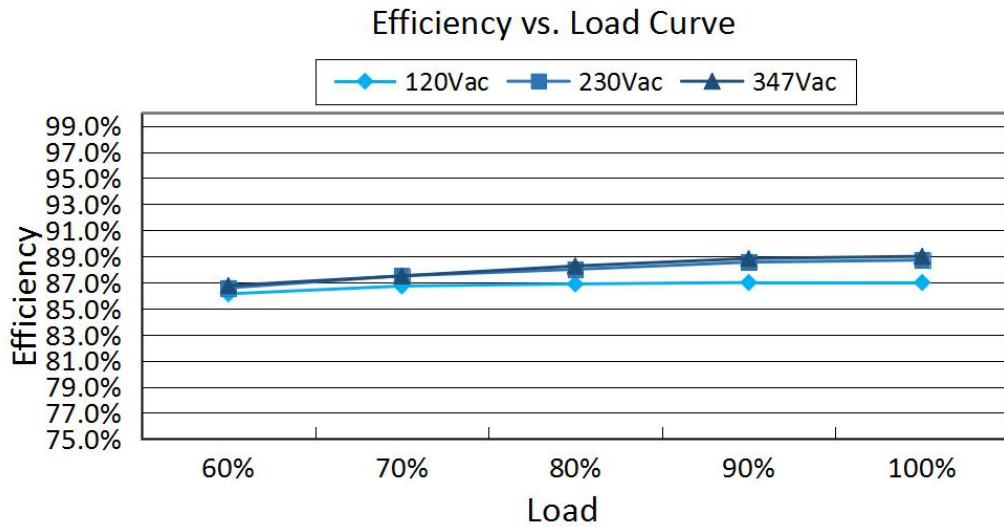


■ Power Factor

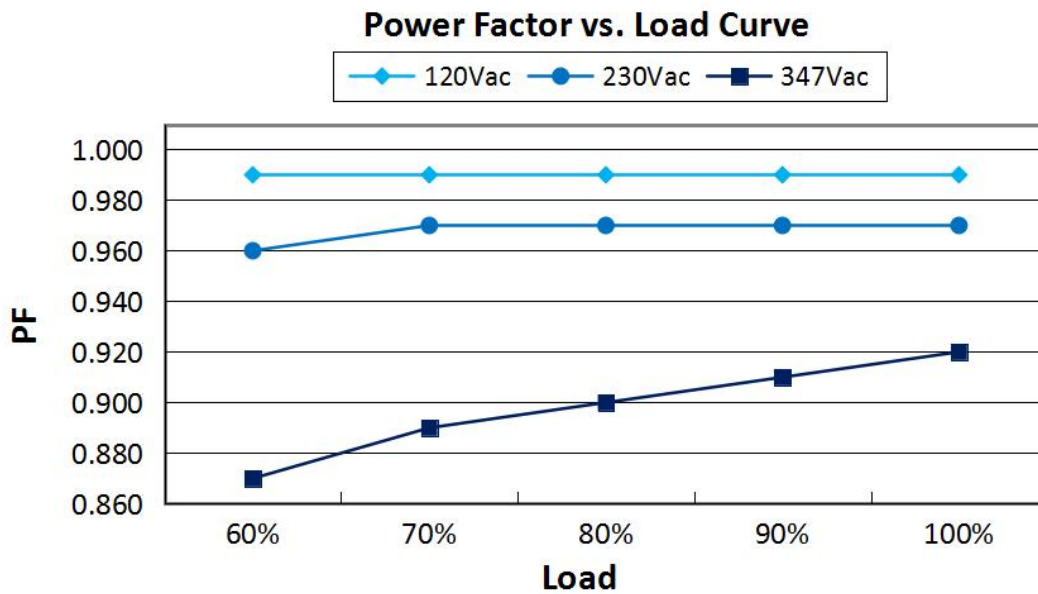

■ THD vs. Load


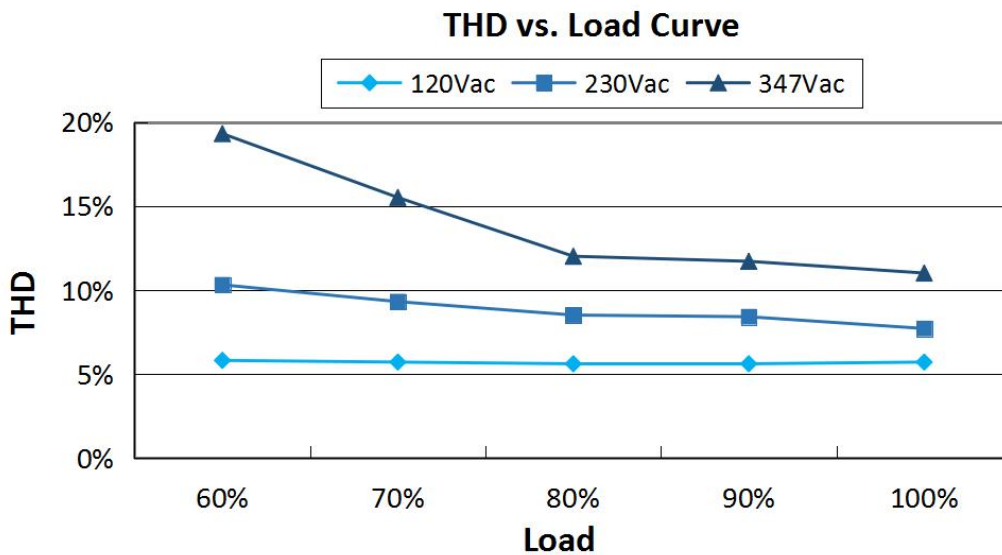


■ Power Curve


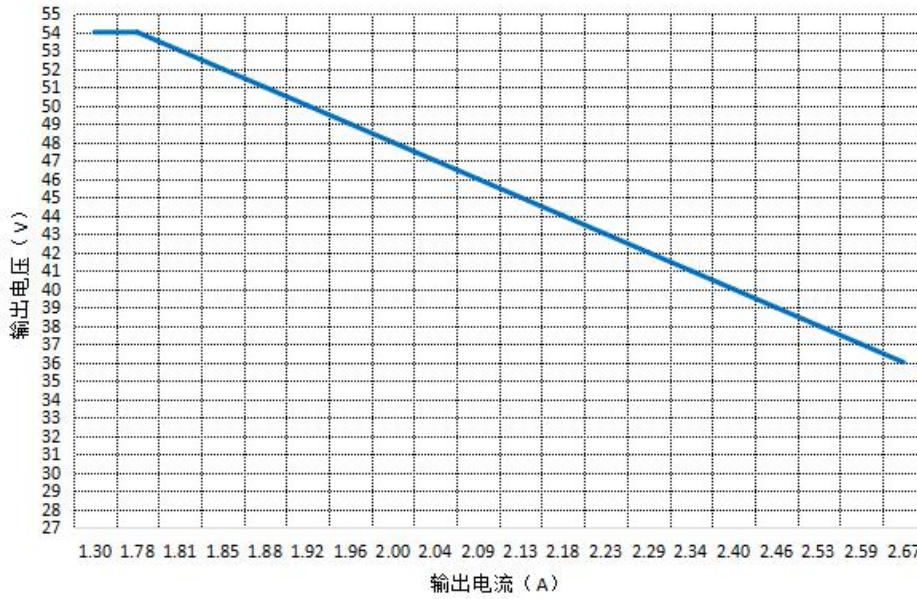


Output power VS Input voltag(50°C max.)

Output power VS Shell temperatur

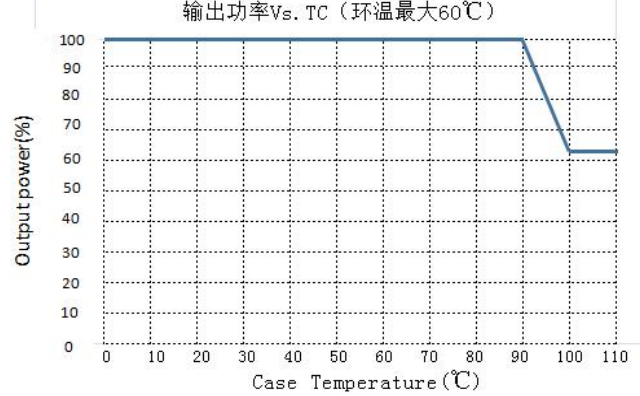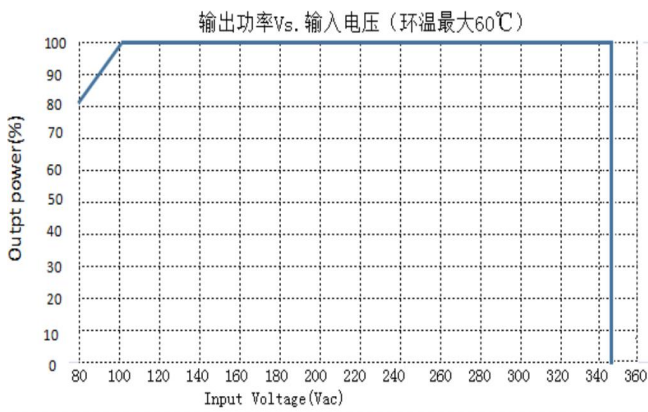


### Dimming curve

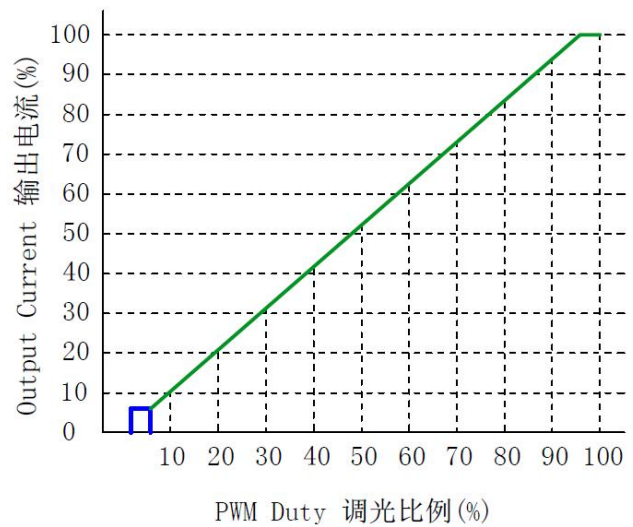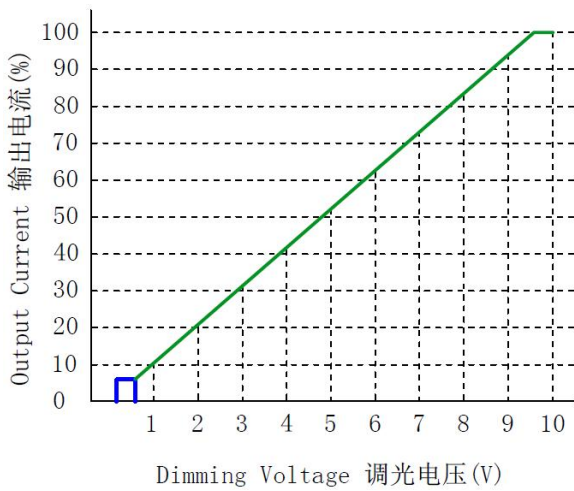


### Life vs. Tc P5




Life vs.Tc

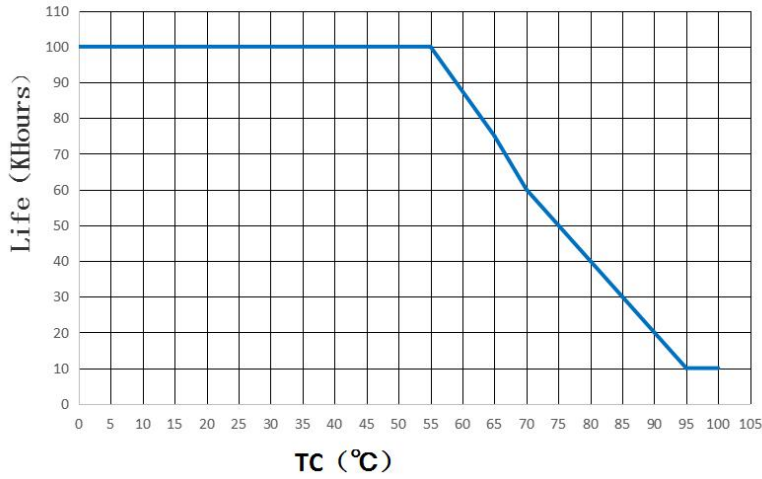

■ Dimensional Drawing (unit: mm)12V

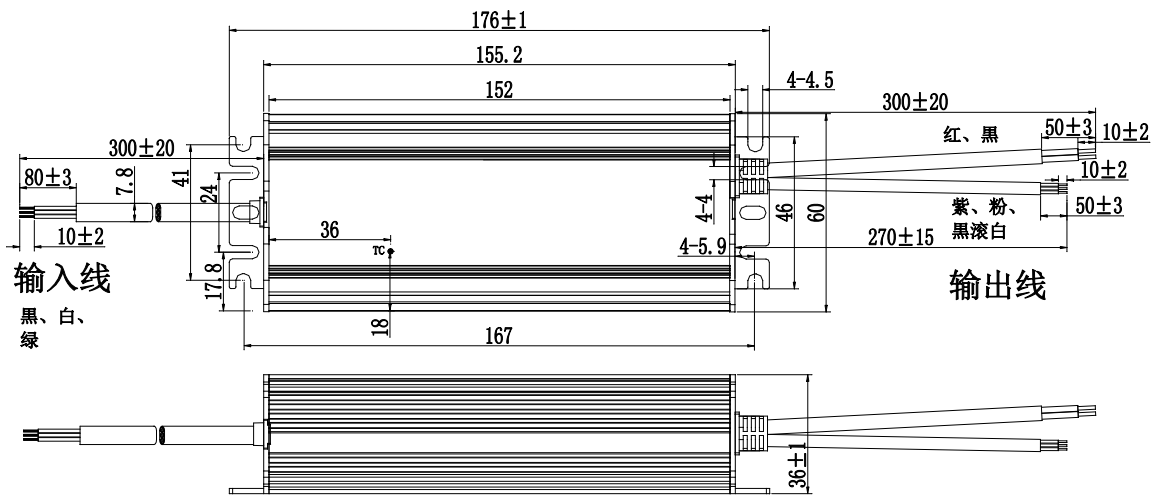


■ Dimensional Drawing (unit: mm)

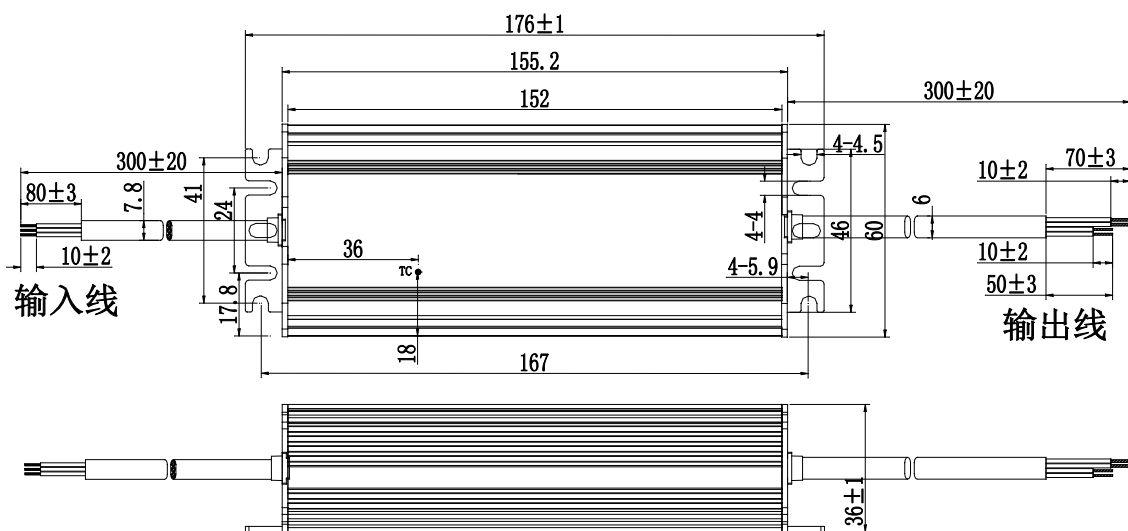


Input Wire UL 600V 18#, Black-L,White-N, Green-PE  
 Output Wire UL 300V 18#, Red\_LED+,Black\_LED-  
 Dimming Wire UL 300V 22#, Purple\_DIM+, Pink\_DIM-  
 Auxiliary Wire UL 300V 22#, Black roll white\_ +12V

### ■ LABEL-With 12V

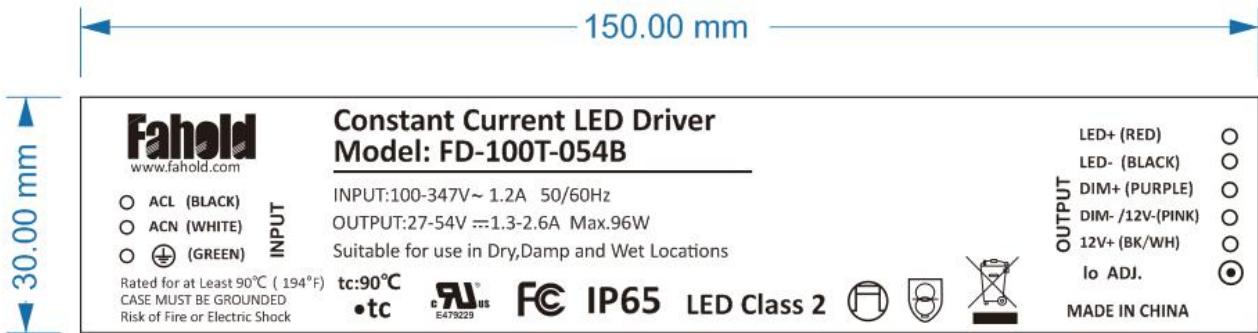

### ■ LABEL

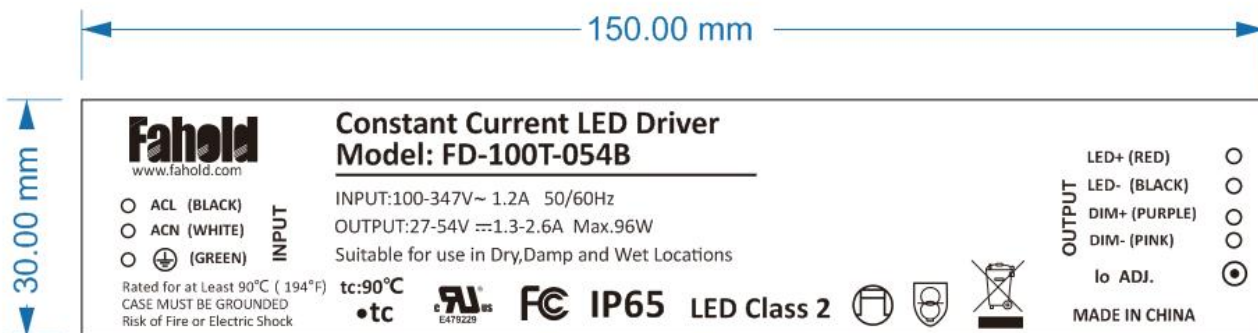


### Installation considerations

- 1.If the led driver has adjustable external potentiometer, we advise you to use 704 silicone to seal the hole well and then plug the waterproof rubber after adjusting output current,
- 2.Lightning protection level meets IEC61000-4-5 standard requirement. If you use the lightning prone area or the are with a complex power grid environment ,we suggest that you should equipped with professional lightning protection module on the led driver AC input terminal.

## Package, Transportation & Storage


### 1.Package

Mode 1 (default factory mode)

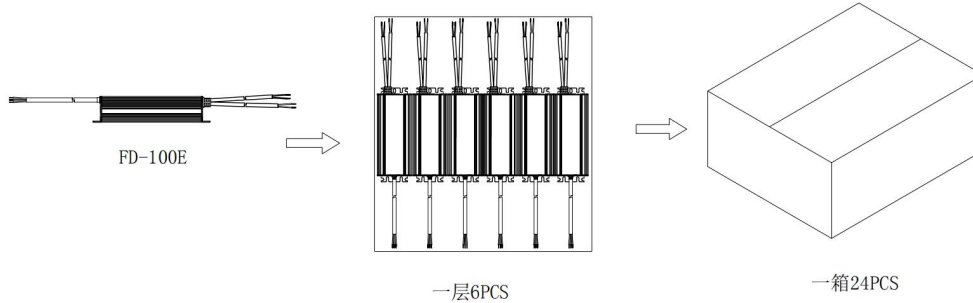


<b>Packing case size</b>	400mmx330mmx172mm (L×W×H)
<b>Quantity</b>	6PCS/Tier; 4Tier/Box; 24 PCS/Box
<b>Weight</b>	667g±5%/PCS; 16.9Kg±5%/Box

Mode 2 (Aircraft box)

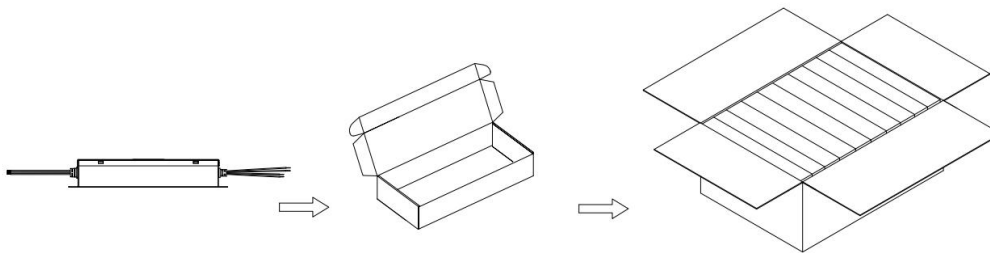

<b>Packing case size</b>	420mmx270mmx195mm (L×W×H)
<b>Quantity</b>	10PCS/Tier; 2Tier/Box; 20 PCS/Box
<b>Weight</b>	667g±5%/PCS; 13.9Kg±5%/Box

Mode 3 (Egg box)

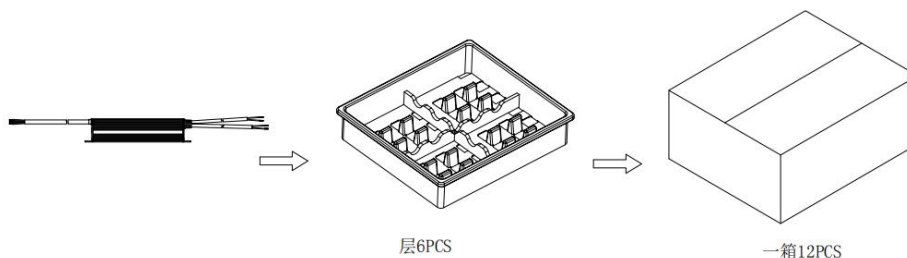

<b>Packing case size</b>	425mmx310mmx225mm (L×W×H)
<b>Quantity</b>	6PCS/Tier; 2Tier/Box; 12 PCS/Box
<b>Weight</b>	667g±5%/PCS; 9.4Kg±5%/Box

## 2. Transportation

Packaging is designed suitable for transportation by truck, ship, and plane. The products should be shielded from sunshine, and loaded and unloaded carefully.

## 3. Storage

The product storage meet the standard of the GB 3873—83.

Product should be re-checked over 1 year and than will be used after they are qualified.

## Disclaimer:

The content of this manual is made according to the existing information of the product. Due to the product version upgrade or other reasons, the content of the manual may be changed. Our company reserves the right to improve the product without prior notice, and reserves the right of final explanation for the performance description of the company's products. Our company is committed to improving the quality of products and constantly upgrading and optimizing the products.

### Products Installation and Using should Note:

- Do not connect alternating current to DC output side and dimming side.
- Please plug the potentiometer hole with 704 silica gel after adjusting the current.
- Do not adjust the potentiometer without permission, so as to avoid the influence of current change on power.
- Application do not exceed the power 96W.
- Do not use the Driver in parallel on the same lamp.
- This product is a constant current LED Driver, and only suitable for LED lamps and lanterns.

### Safety and Attentions

In order to reduce the risk of personal injury, electric shock, fire, and power supply damage, please read the following specifications carefully and follow these rules to prevent danger.

- Do not install the Driver in the area with inflammable and explosive materials to avoid explosion and fire.
- Please do not disassemble the Driver and replace the components without permission, so as to avoid electric shock.

### ECN History ECN

Rev	Description of Change		Changed Date	Notes
	Before	After		
00	Original Release	---	2022/04/13	